



ECONOMIC

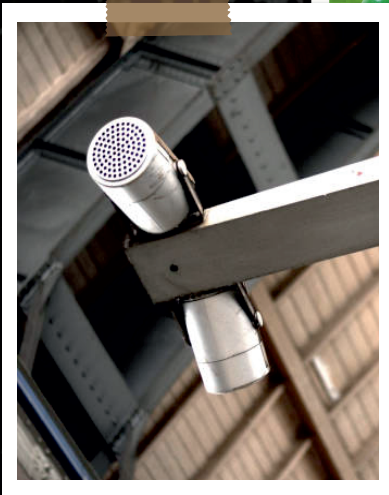

ECS601-06

Ceiling Speaker, ABS Grille, 6W

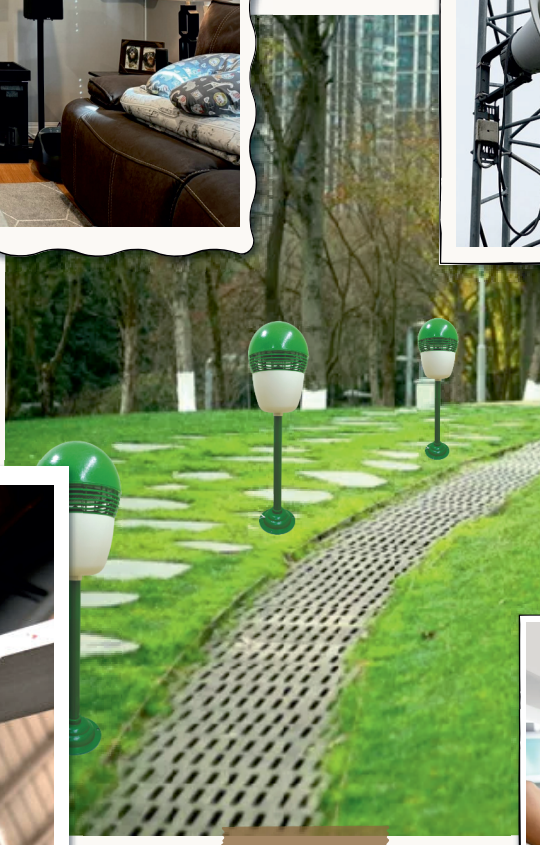

ECS602-06

Ceiling Speaker, ABS Grille, 6W



ECS-6S06

Ceiling Speaker, ABS Grille, 6W



Features

- ▶ High quality ceiling speaker with stylish frame and grille provides high sound output in a wider area. Full range speaker for speech and music reproduction.
- ▶ 100V line operation with power taps 6w, 3w and 1.5w.
- ▶ 6" full range speaker, 6W/100V.
- ▶ Ideal for railways and metro station, factories, offices, shops, malls etc.
- ▶ Easy mounting with spring loaded wing clamps.

TECHNICAL SPECIFICATIONS

Rated Power / Max. Power	6W / 9W
Power Tappings	6W - 3W - 1.5W
SPL at 1W (at 1Khz,1m)	92 dB
Impedance	1667/3333/6666 ohm
Frequency range (-10 dB)	60 Hz ~15KHz
Dimensions	210mm (OD)x 78mm (H)
Cutout Diameter	180mm
Weight	0.67 Kg
Material	ABS
Color	White

Features

- ▶ High quality ceiling speaker with stylish frame and grille provides high sound output in a wider area. Full range speaker for speech and music reproduction.
- ▶ 100V line operation with power taps 6w, 3w and 1.5w.
- ▶ 6" full range speaker, 6W/100V.
- ▶ Ideal for railways and metro station, factories, offices, shops, malls etc.
- ▶ Easy mounting with spring loaded wing clamps.

TECHNICAL SPECIFICATIONS

Rated Power / Max. Power	6W / 9W
Power Tappings	6W - 3W - 1.5W
SPL at 1W (at 1Khz,1m)	92 dB
Impedance	1667/3333/6666 ohm
Frequency range (-10 dB)	60 Hz ~15KHz
Dimensions	210mm (OD)x 75mm (H)
Cutout Diameter	180mm
Weight	0.650 Kg
Material	ABS
Color	White

Features

- ▶ High quality ceiling speaker with stylish frame and grille provides high sound output in a wider area. Full range speaker for speech and music reproduction.
- ▶ 100V line operation with power taps 6w, 3w and 1.5w.
- ▶ 6" full range speaker, 6W/100V.
- ▶ Ideal for railways and metro station, factories, offices, shops, malls etc.
- ▶ Easy mounting with spring loaded wing clamps.

TECHNICAL SPECIFICATIONS

Rated Power / Max. Power	6W / 9W
Power Tappings	6W - 3W - 1.5W
SPL at 1W (at 1Khz,1m)	92 dB
Impedance	1667/3333/6666 ohm
Frequency range (-10 dB)	60 Hz ~15KHz
Dimensions	210mm (OD)x 75mm (H)
Cutout Diameter	180mm
Weight	0.680 Kg
Material	ABS
Color	White

ECS-AT106

Ceiling Speaker, Metal Grille, 6W



Features

- ▶ High quality ceiling speaker with stylish frame and grille provides high sound output in a wider area.
- ▶ Full range speaker for speech and music reproduction.
- ▶ 100V line operation with power taps 6w, 3w and 1.5w.
- ▶ 6" full range speaker, 6W/100V.
- ▶ Ideal for railways and metro station, factories, offices, shops, malls etc.
- ▶ Easy mounting with spring loaded wing clamps.

TECHNICAL SPECIFICATIONS

Rated Power / Max. Power	6W / 9W
Power Tappings	6W - 3W - 1.5W
SPL at 1W (at 1Khz,1m)	92 dB
Impedance	1667/3333/6666 ohm
Frequency range (-10 dB)	60 Hz ~15KHz
Dimensions	210mm (OD)x 85mm (H)
Cutout Diameter	180mm
Weight	0.67 Kg
Material	ABS
Color	White

ECS-SE06M

Ceiling Speaker, Metal Body, 6W



Features

- ▶ High quality ceiling speaker with stylish metal frame and metal grille provides high sound output in a wider area. Full range speaker for speech and music reproduction.
- ▶ 100V line operation with power taps 6w, 3w and 1.5w.
- ▶ 6" full range speaker, 6W/100V.
- ▶ Ideal for railways and metro station, factories, offices, shops, malls etc.
- ▶ Easy mounting with spring loaded wing clamps.

TECHNICAL SPECIFICATIONS

Rated Power / Max. Power	6W / 9W
Power Tappings	6W - 3W - 1.5W
SPL at 1W (at 1Khz,1m)	92 dB
Impedance	1667/3333/6666 ohm
Frequency range (-10 dB)	60 Hz ~15KHz
Dimensions	199mm (OD)x 70mm (H)
Cutout Diameter	165mm
Weight	0.730 Kg
Material	Metal
Color	White

ECS-SE06A

Ceiling Speaker, ABS Body,6W



Features

- ▶ High quality ceiling speaker with stylish ABS frame and metal grille provides high sound output in a wider area. Full range speaker for speech and music reproduction.
- ▶ 100V line operation with power taps 6w, 3w and 1.5w.
- ▶ 6" full range speaker, 6W/100V.
- ▶ Ideal for railways and metro station, factories, offices, shops, malls etc.
- ▶ Easy mounting with spring loaded wing clamps.

TECHNICAL SPECIFICATIONS

Rated Power / Max. Power	6W / 9W
Power Tappings	6W - 3W - 1.5W
SPL at 1W (at 1Khz,1m)	92 dB
Impedance	1667/3333/6666 ohm
Frequency range (-10 dB)	60 Hz ~15KHz
Dimensions	205mm (OD)x 75mm (H)
Cutout Diameter	170mm
Weight	0.690 Kg
Material	ABS
Color	White

ECS-5S06

Ceiling Speaker, ABS Grille, 6W



Features

- ▶ High quality ceiling speaker with stylish frame and grille provides high sound output in a wider area. Full range speaker for speech and music reproduction.
- ▶ 100V line operation with power taps 6w, 3w and 1.5w.
- ▶ 5" full range speaker, 6W/100V.
- ▶ Ideal for railways and metro station, factories, offices, shops, malls etc.
- ▶ Easy mounting with spring loaded wing clamps.

TECHNICAL SPECIFICATIONS

Rated Power / Max. Power	6W / 9W
Power Tappings	6W - 3W - 1.5W
SPL at 1W (at 1Khz,1m)	92 dB
Impedance	1667/3333/6666 ohm
Frequency range (-10 dB)	60 Hz ~15KHz
Dimensions	182mm (OD)x 72mm (H)
Cutout Diameter	153mm
Weight	0.590 Kg
Material	ABS
Color	White

ECS-501

Ceiling Speaker, Metal Grille, 6W



Features

- ▶ High quality ceiling speaker with stylish frame and grille provides high sound output in a wider area. Full range speaker for speech and music reproduction.
- ▶ 100V line operation with power taps 6w, 3w and 1.5w.
- ▶ 5" full range speaker, 6W/100V.
- ▶ Ideal for railways and metro station, factories, offices, shops, malls etc.
- ▶ Easy mounting with spring loaded wing clamps.

TECHNICAL SPECIFICATIONS

Rated Power / Max. Power	6W / 9W
Power Tappings	6W - 3W - 1.5W
SPL at 1W (at 1Khz,1m)	92 dB
Impedance	1667/3333/6666 ohm
Frequency range (-10 dB)	60 Hz ~15KHz
Dimensions	181mm (OD)x 75mm (H)
Cutout Diameter	157mm
Weight	0.500 Kg
Material	ABS
Color	White

ECS-502H

Ceiling Speaker, Metal Grille, 6W



Features

- ▶ High quality ceiling speaker with stylish frame and grille provides high sound output in a wider area. Full range speaker for speech and music reproduction.
- ▶ 100V line operation with power taps 6w, 3w and 1.5w.
- ▶ 5" full range speaker, 6W/100V.
- ▶ Ideal for railways and metro station, factories, offices, shops, malls etc.
- ▶ Easy mounting with spring loaded wing clamps.

TECHNICAL SPECIFICATIONS

Rated Power / Max. Power	6W / 9W
Power Tappings	6W - 3W - 1.5W
SPL at 1W (at 1Khz,1m)	92 dB
Impedance	1667/3333/6666 ohm
Frequency range (-10 dB)	60 Hz ~15KHz
Dimensions	175mm (OD)x 60mm (H)
Cutout Diameter	144mm
Weight	0.480 Kg
Material	ABS
Color	White

ECS801-20

Ceiling Speaker, ABS Body, 20W



Features

- ▶ High quality ceiling speaker with stylish frame and grille provides high sound output in a wider area. Full range speaker for speech and music reproduction.
- ▶ 100V line operation with power taps 20w, 10w and 5w.
- ▶ 8" full range speaker, 20W/100V.
- ▶ Ideal for railways and metro station, factories, offices, shops, malls etc.
- ▶ Easy mounting with spring loaded wing clamps.

TECHNICAL SPECIFICATIONS

Rated Power / Max. Power	20W / 30W
Power Tappings	20W - 10W - 5W
SPL at 1W (at 1Khz, 1m)	93 dB
Impedance	500/1000/2000 ohm
Frequency range (-10 dB)	50 Hz ~14KHz
Dimensions	251mm (OD)x 95mm (H)
Cutout Diameter	220mm
Weight	1.170 Kg
Material	ABS
Color	White

ECS401-06

Ceiling Speaker, ABS Grille, 6W



Features

- ▶ High quality ceiling speaker with stylish frame and grille provides high sound output in a wider area. Full range speaker for speech and music reproduction.
- ▶ 100V line operation with power taps 6w, 3w and 1.5w.
- ▶ 4" full range speaker, 6W/100V.
- ▶ Ideal for railways and metro station, factories, offices, shops, malls etc.
- ▶ Easy mounting with spring clamps.

TECHNICAL SPECIFICATIONS

Rated Power / Max. Power	6W / 9W
Power Tappings	6W - 3W - 1.5W
SPL at 1W (at 1Khz, 1m)	92 dB
Impedance	1667/3333/6666 ohm
Frequency range (-10 dB)	80 Hz ~15KHz
Dimensions	159mm (OD)x 55mm (H)
Cutout Diameter	137mm
Weight	0.52 Kg
Material	ABS
Color	White

ECS-4S06

Ceiling Speaker, ABS Grille, 6W



Features

- ▶ High quality ceiling speaker with beautiful moulded plastic frame and grille. Full range speaker for speech and music reproduction.
- ▶ 100V line operation with power taps 6w, 3w and 1.5w.
- ▶ 4" full range speaker, 6W/100V.
- ▶ Ideal for railways and metro station, factories, offices, shops, malls etc.
- ▶ Easy mounting with spring mounting clamps.

TECHNICAL SPECIFICATIONS

Rated Power / Max. Power	6W/9W
Power Tappings	6W - 3W - 1.5W
SPL at 1W (at 1Khz, 1m)	92 dB
Impedance	1667/3333/6666 ohm
Frequency range (-10 dB)	80 Hz ~15KHz
Dimensions	159mm (OD)x 65mm (H)
Cutout Diameter	137mm
Weight	0.510 Kg
Material	ABS
Color	White

ECS-AT104

Ceiling Speaker, Metal Grille, 6W



Features

- ▶ High quality ceiling speaker with stylish frame and grille provides high sound output in a wider area. Full range speaker for speech and music reproduction.
- ▶ 100V line operation with power taps 6w, 3w and 1.5w.
- ▶ 4" full range speaker, 6W/100V.
- ▶ Ideal for railways and metro station, factories, offices, shops, malls etc.
- ▶ Easy mounting with spring loaded wing clamps.

TECHNICAL SPECIFICATIONS

Rated Power / Max. Power	6W / 9W
Power Tappings	6W - 3W - 1.5W
SPL at 1W (at 1Khz,1m)	92 dB
Impedance	1667/3333/6666 ohm
Frequency range (-10 dB)	80 Hz ~15KHz
Dimensions	160mm (OD)x 75mm (H)
Cutout Diameter	137mm
Weight	0.530 Kg
Material	ABS
Color	White

ECS-CP06

Ceiling Speaker ABS Body with Metal Grill,6W



Features

- ▶ High quality ceiling speaker with stylish frame and grille provides high sound output in a wider area. Full range speaker for speech and music reproduction.
- ▶ 100V line operation with power taps 6w, 3w and 1.5w.
- ▶ 4" full range speaker, 6W/100V.
- ▶ Ideal for railways and metro station, factories, offices, shops, malls etc.
- ▶ Easy mounting with spring loaded wing clamps.

TECHNICAL SPECIFICATIONS

Rated Power / Max. Power	6W / 9W
Power Tappings	6W - 3W - 1.5W
SPL at 1W (at 1Khz,1m)	89 dB
Impedance	1667/3333/6666 ohm
Frequency range (-10 dB)	125 Hz ~16KHz
Dimensions	149mm (OD)x 70mm (H)
Cutout Diameter	116mm
Weight	0.470 Kg
Material	ABS
Color	White

ECS301-06

Compact Ceiling Speaker, ABS Grille, 6W



Features

- ▶ High quality compact ceiling speaker with stylish frame and grille. Full range speaker for speech and music reproduction. Designed to fit in almost any location especially where space is limited.
- ▶ 100V line operation with power taps 6w, 3w and 1.5w.
- ▶ 3" full range speaker, 6W/100V.
- ▶ Ideal for railways and metro station, factories, offices, shops, malls etc.
- ▶ Easy mounting with spring clamps.

TECHNICAL SPECIFICATIONS

Rated Power / Max. Power	6W/9W
Power Tappings	6W - 3W - 1.5W
SPL at 1W (at 1Khz,1m)	86 dB
Impedance	1667/3333/6666 ohm
Frequency range (-10 dB)	80 Hz ~15KHz
Dimensions	110mm (OD)x 85mm (H)
Cutout Diameter	82.0 mm
Weight	0.54 Kg
Material	ABS
Color	White

ECS302-06

Compact Ceiling Speaker, Metal Grille, 6W




ECS302H-06

Compact Ceiling Speaker with Housing, Metal Grille, 6W



ECS303-06

Compact Ceiling Speaker, Metal Grille, 6W

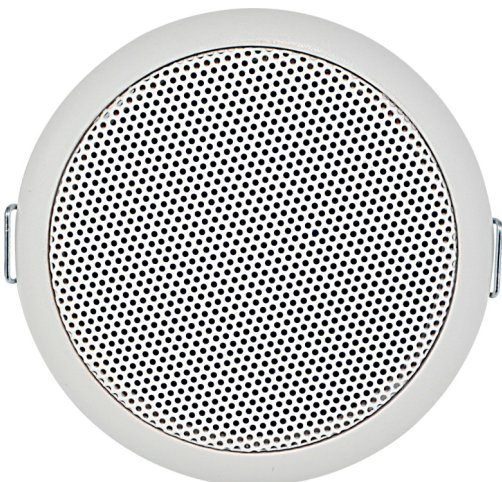

Features

- ▶ High quality compact ceiling speaker with stylish frame and grille. Full range speaker for speech and music reproduction. Designed to fit in almost any location especially where space is limited.
- ▶ 100V line operation with power taps 6w, 3w and 1.5w.
- ▶ 3" full range speaker, 6W/100V.
- ▶ Ideal for railways and metro station, factories, offices, shops, malls etc.
- ▶ Easy mounting with spring clamps.

TECHNICAL SPECIFICATIONS

Rated Power / Max. Power	6W / 9W
Power Tappings	6W - 3W - 1.5W
SPL at 1W (at 1Khz,1m)	86 dB
Impedance	1667/3333/6666 ohm
Frequency range (-10 dB)	70 Hz ~15KHz
Dimensions	138mm (OD)x 88mm (H)
Cutout Diameter	140mm
Weight	0.58 Kg
Material	ABS
Color	White

Features

- ▶ High quality compact ceiling speaker with stylish frame and grille. Full range speaker for speech and music reproduction. Provides high sound output in a wide area.
- ▶ 100V line operation with power taps 6w, 3w and 1.5w.
- ▶ 3" full range speaker, 6W/100V.
- ▶ Ideal for railways and metro station, factories, offices, shops, malls etc.
- ▶ Easy mounting with spring loaded wing clamps.

TECHNICAL SPECIFICATIONS

Rated Power / Max. Power	6W / 9W
Power Tappings	6W - 3W - 1.5W
SPL at 1W (at 1Khz,1m)	86 dB
Impedance	1667/3333/6666 ohm
Frequency range (-10 dB)	70 Hz ~15KHz
Dimensions	138mm (OD)x 100mm (H)
Cutout Diameter	140mm
Weight	0.67 Kg
Material	ABS
Color	White

Features

- ▶ High quality compact ceiling speaker with stylish frame and grille. Full range speaker for speech and music reproduction. Designed to fit in almost any location especially where space is limited.
- ▶ 100V line operation with power taps 6w, 3w and 1.5w.
- ▶ 3" full range speaker, 6W/100V.
- ▶ Ideal for railways and metro station, factories, offices, shops, malls etc.
- ▶ Easy mounting with spring clamps.

TECHNICAL SPECIFICATIONS

Rated Power / Max. Power	6W / 9W
Power Tappings	6W - 3W - 1.5W
SPL at 1W (at 1Khz,1m)	86 dB
Impedance	1667/3333/6666 ohm
Frequency range (-10 dB)	70 Hz ~15KHz
Dimensions	95mm (OD)x 80mm (H)
Cutout Diameter	85.0mm
Weight	0.38 Kg
Material	ABS
Color	White

ECS304-06

Compact Ceiling Speaker, Metal Grille, 6W



Features

- ▶ High quality compact ceiling speaker with stylish frame and grille.
- ▶ Full range speaker for speech and music reproduction.
- ▶ Designed to fit in almost any location especially where space is limited.
- ▶ 100V line operation with power taps 6w, 3w and 1.5w.
- ▶ 3" full range speaker, 6W/100V.
- ▶ Ideal for railways and metro station, factories, offices, shops, malls etc.
- ▶ Easy mounting with spring clamps.

TECHNICAL SPECIFICATIONS

Rated Power / Max. Power	6W / 9W
Power Tappings	6W - 3W - 1.5W
SPL at 1W (at 1Khz,1m)	86 dB
Impedance	1667/3333/6666 ohm
Frequency range (-10 dB)	70 Hz ~15KHz
Dimensions	103mm (OD)x 80mm (H)
Cutout Diameter	85.0mm
Weight	0.380 Kg
Material	ABS
Color	White

ECS250-RL

Compact Ceiling Speaker, Metal Grille, 6W



Features

- ▶ High quality compact ceiling speaker with stylish metal grille and rimless frame.
- ▶ Full range speaker for speech and music reproduction.
- ▶ Designed to fit in almost any location especially where space is limited.
- ▶ 100V line operation with power taps 6w, 3w and 1.5w.
- ▶ 2.5" full range speaker, 6W/100V.
- ▶ Ideal for railways and metro station, factories, offices, shops, malls etc.
- ▶ Easy mounting with spring clamps.

TECHNICAL SPECIFICATIONS

Rated Power / Max. Power	6W/9W
Power Tappings	6W - 3W - 1.5W
SPL at 1W (at 1Khz,1m)	86 dB
Impedance	1667/3333/6666 ohm
Frequency range (-10 dB)	80 Hz ~15KHz
Dimensions	103mm (OD)x 80mm (H)
Cutout Diameter	92.0mm
Weight	0.45 Kg
Material	ABS
Color	White

ECS-SE06M- (5")

Ceiling Speaker, Metal Body, 6W- 5 Inch



Features

- ▶ High quality ceiling speaker with stylish metal frame and metal grille provides high sound output in a wider area.
- ▶ 100V line operation with power taps 6w, 3w and 1.5w.
- ▶ 5" full range speaker for speech and music reproduction , 6W/100V.
- ▶ Ideal for railways and metro station, factories, offices, shops, malls etc.
- ▶ Easy mounting with spring loaded wing clamps.

TECHNICAL SPECIFICATIONS

Rated Power / Max. Power	6W/9W
Power Tappings	6W - 3W - 1.5W
SPL at 1W (at 1Khz,1m)	90 dB
Impedance	1667/3333/6666 ohm
Frequency range (-10 dB)	80 Hz ~15KHz
Dimensions	181mm (OD)x 60mm (H)
Cutout Diameter	155mm
Weight	0.60 Kg
Material	Metal
Color	White


ECS-SE12A

Ceiling Speaker, ABS Body, 12W




ECS603-12

Ceiling Speaker, ABS Body, 12W

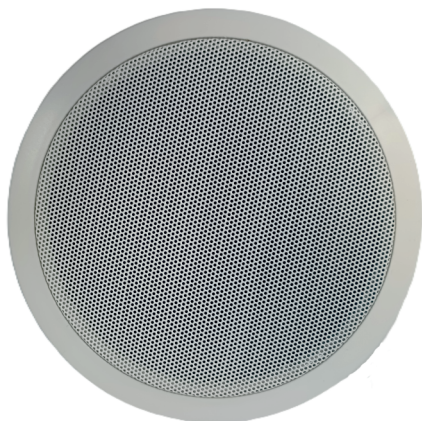

ECS604-RL

Ceiling Speaker, Metal Grille, 6W

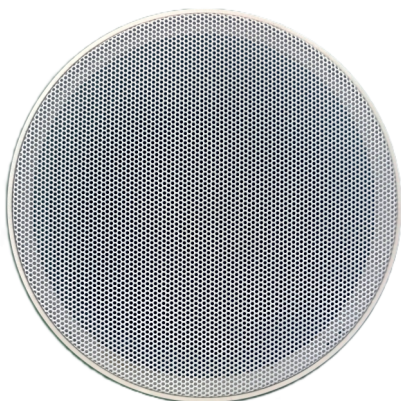

Features

- ▶ High quality ceiling speaker with stylish ABS frame and metal grille provides high sound output in a wider area
- ▶ 100V line operation with power taps 12W, 6W and 3W.
- ▶ 6" full range speaker for speech and music reproduction, 12W/100V.
- ▶ Ideal for railways and metro station, factories, offices, shops, malls etc.
- ▶ Easy mounting with spring loaded wing clamps.

TECHNICAL SPECIFICATIONS

Rated Power / Max. Power	12W / 18W
Power Tappings	12W - 6W - 3W
SPL at 1W (at 1Khz,1m)	92 dB
Impedance	833/1667/3333 ohm
Frequency range (-10 dB)	70 Hz ~15KHz
Dimensions	205mm (OD)x 87mm (H)
Cutout Diameter	170mm
Weight	0.78 Kg
Material	ABS
Color	White

Features

- ▶ High quality ceiling speaker with stylish ABS frame and metal grille provides high sound output in a wider area
- ▶ 100V line operation with power taps 12W, 6W and 3W.
- ▶ 6" full range speaker for speech and music reproduction, 12W/100V.
- ▶ Ideal for railways and metro station, factories, offices, shops, malls etc.
- ▶ Easy mounting with spring loaded wing clamps.

TECHNICAL SPECIFICATIONS

Rated Power / Max. Power	12W / 18W
Power Tappings	12W - 6W - 3W
SPL at 1W (at 1Khz,1m)	92 dB
Impedance	833/1667/3333 ohm
Frequency range (-10 dB)	60 Hz ~15KHz
Dimensions	189mm (OD)x 90mm (H)
Cutout Diameter	170mm
Weight	0.77 Kg
Material	ABS
Color	White

Features

- ▶ High quality ceiling speaker with stylish metal grille and rimless frame.
- ▶ Full range speaker for speech and music reproduction.
- ▶ 100V line operation with power taps 6w, 3w and 1.5w.
- ▶ 6" full range speaker, 6W/100V.
- ▶ Ideal for railways and metro station, factories, offices, shops, malls etc.
- ▶ Easy mounting with spring loaded wing clamps.

TECHNICAL SPECIFICATIONS

Rated Power / Max. Power	6W / 9W
Power Tappings	6W - 3W - 1.5W
SPL at 1W (at 1Khz,1m)	90 dB
Impedance	1667/3333/6666 ohm
Frequency range (-10 dB)	60 Hz ~15KHz
Dimensions	173mm (OD)x 78mm (H)
Cutout Diameter	155.0mm
Weight	0.72 Kg
Material	ABS Frame & Metal Grille
Color	White

ESP301-12

Compact Single Projection Speaker, 12W



Features

- ▶ Single projection speaker with strong plastic cabinet and metal grille. Provides uniform ambience of sound in a wider area.
- ▶ Full range speaker for speech and music reproduction.
- ▶ 100V line operation with power taps 12w, 6w and 8ohm.
- ▶ 3" full range speakers , 12W/100V.
- ▶ Ideal for railways and metro platforms, factories, parking lots, schools, corridors etc.
- ▶ U type mounting bracket for easy and trouble free installation.

TECHNICAL SPECIFICATIONS

Rated Power / Max. Power	12W / 18W
Power Tappings	12W - 6W - 8 Ohm
SPL at 1W (at 1Khz,1m)	92 dB
Impedance	833/1667 ohm
Frequency range (-10 dB)	120 Hz ~15KHz
Dimensions	87mm (OD)x 120mm (H)
Weight	0.660 Kg
Material	ABS
Color	White

ESP501-06

Single Projection Speaker, ABS Grille, 6W



Features

- ▶ Stylish single projection speaker with strong plastic cabinet and grille. Provides uniform ambience of sound in a wider area. Full range speaker for speech and music reproduction.
- ▶ 100V line operation with power taps 6w, 3w and 1.5w.
- ▶ 5" full range speaker, 6W/100V.
- ▶ Ideal for railways and metro platforms, factories, parking lots, schools, corridors etc.
- ▶ U type mounting bracket for easy and trouble free installation.

TECHNICAL SPECIFICATIONS

Rated Power / Max. Power	6W / 9W
Power Tappings	6W - 3W - 1.5W
SPL at 1W (at 1Khz,1m)	91 dB
Impedance	1667/3333/6666 ohm
Frequency range (-10 dB)	120 Hz ~15KHz
Dimensions	145mm (OD)x 205mm (H)
Weight	1.380 Kg
Material	ABS
Color	White

ESP501D-12

Dual Projection Speaker, ABS Grille, 12W



Features

- ▶ Bi-directional projection speaker with strong plastic cabinet and grille. Provides uniform ambience of sound in a wider area. Full range speaker for speech and music reproduction.
- ▶ 100V line operation with power taps 12w, 6w and 3w.
- ▶ 2 x 5" full range speakers facing in opposite direction, 12W/100V.
- ▶ Ideal for railways and metro platforms, factories, parking lots, schools, corridors etc.
- ▶ U type mounting bracket for easy and trouble free installation.

TECHNICAL SPECIFICATIONS

Rated Power / Max. Power	12W / 18W
Power Tappings	12W - 6W - 3W
SPL at 1W (at 1Khz,1m)	92 dB
Impedance	833/1667/3333 ohm
Frequency range (-10 dB)	120 Hz ~15KHz
Dimensions	145mm (OD)x 205mm (H)
Weight	1.685 Kg
Material	ABS
Color	White

ESP502-06

Single Projection Speaker, Metal Grille, 6W



ESP502D-12

Dual Projection Speaker, Metal Grill, 12W



Features

- ▶ Stylish single projection speaker with strong plastic cabinet and metal grille. Provides uniform ambience of sound in a wider area.
- ▶ Full range speaker for speech and music reproduction.
- ▶ 100V line operation with power taps 6w, 3w and 1.5w.
- ▶ 5" full range speaker, 6W/100V.
- ▶ Ideal for railways and metro platforms, factories, parking lots, schools, corridors etc.
- ▶ U type mounting bracket for easy and trouble free installation.

TECHNICAL SPECIFICATIONS

Rated Power / Max. Power	6W / 9W
Power Tappings	6W - 3W - 1.5W
SPL at 1W (at 1Khz,1m)	91 dB
Impedance	1667/3333/6666 ohm
Frequency range (-10 dB)	120 Hz ~15KHz
Dimensions	145mm (OD)x 205mm (H)
Weight	1.380 Kg
Material	ABS
Color	White

Features


- ▶ Bi-directional projection speaker with strong plastic cabinet and metal grille. Provides uniform ambience of sound in a wider area.
- ▶ Full range speaker for speech and music reproduction.
- ▶ 100V line operation with power taps 12w, 6w and 3w.
- ▶ 2 x 5" full range speakers facing in opposite direction, 12W/100V.
- ▶ Ideal for railways and metro platforms, factories, parking lots, schools, corridors etc.
- ▶ U type mounting bracket for easy and trouble free installation.

TECHNICAL SPECIFICATIONS

Rated Power / Max. Power	12W / 18W
Power Tappings	12W - 6W - 3W
SPL at 1W (at 1Khz,1m)	92 dB
Impedance	833/1667/3333 ohm
Frequency range (-10 dB)	120 Hz ~15KHz
Dimensions	145mm (OD)x 205mm (H)
Weight	1.70 Kg
Material	ABS
Color	White


EWB 701

Wall Mount Wooden Cabinet Speaker, 6W

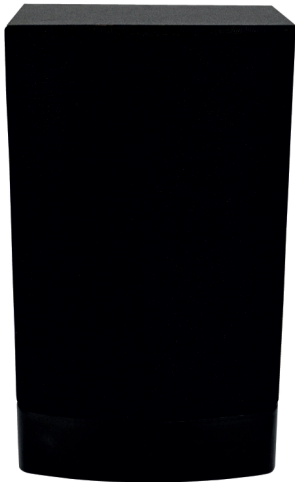

EWB 702

Wall Mount Wooden Cabinet Speaker, 12W

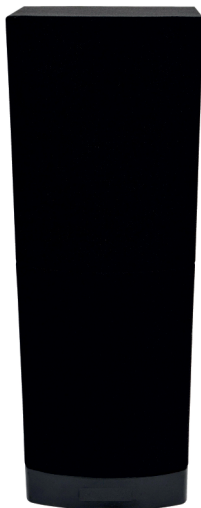

EWB 703

Bi-dir Wall Mount Wooden Cabinet Speaker, 12W



Features

- ▶ Superb quality wooden cabinet speaker with stylish design provides high sound output in a wider area.
- ▶ Full range speaker for speech and music reproduction.
- ▶ 100V line operation with power taps 6w, 3w and 1.5w.
- ▶ 6"x4" full range speaker, 6W/100V.
- ▶ Ideal for railways and metro station, factories, Corridors, shops, malls etc.
- ▶ Key holes for easy wall mounting.

TECHNICAL SPECIFICATIONS

Rated Power / Max. Power	6W / 9W
Power Tappings	6W - 3W - 1.5W
SPL at 1W (at 1Khz, 1m)	87 dB
Impedance	1667/3333/6666 ohm
Frequency range (-10 dB)	200 Hz ~15KHz
Dimensions	130mm (L)x 140mm (W) x 225mm (H)
Weight	1.270 Kg
Material	MDF Board
Color	Black

Features

- ▶ Superb quality wooden cabinet speaker with stylish design provides high sound output in a wider area.
- ▶ Full range speaker for speech and music reproduction.
- ▶ 100V line operation with power taps 12w, 6w and 3w
- ▶ 2 x 6"x4" full range speaker, 12W/100V.
- ▶ Ideal for railways and metro station, factories, Corridors, shops, malls etc.
- ▶ Key holes for easy wall mounting.

TECHNICAL SPECIFICATIONS

Rated Power / Max. Power	12W / 18W
Power Tappings	12W - 6W - 3W
SPL at 1W (at 1Khz, 1m)	89 dB
Impedance	833/1667/3333 ohm
Frequency range (-10 dB)	200 Hz ~15KHz
Dimensions	130mm (L)x 150mm (W) x 427mm (H)
Weight	2.31 Kg
Material	MDF Board
Color	Black

Features

- ▶ Bi-directional wooden cabinet speaker with superb quality and stylish design provides high sound output in a wider area.
- ▶ Full range speaker for speech and music reproduction.
- ▶ 100V line operation with power taps 12W, 6W, and 3W.
- ▶ 2 x 6"x4" full range speaker, 12W/100V.
- ▶ Ideal for railways and metro station, factories, Corridors, shops, malls etc.
- ▶ Key holes for easy wall mounting.

TECHNICAL SPECIFICATIONS

Rated Power / Max. Power	12W / 18W
Power Tappings	12W - 6W - 3W
SPL at 1W (at 1Khz, 1m)	87 dB
Impedance	833/1667/3333 ohm
Frequency range (-10 dB)	200 Hz ~15KHz
Dimensions	215mm (L)x 120mm (W) x 225mm (H)
Weight	1.80 Kg
Material	MDF Board
Color	Black

EWB 704

Wall Mount Wooden Cabinet Speaker, 24W



Features


- ▶ Wooden cabinet column speaker with superb quality and stylish design provides high sound output in a wider area.
- ▶ Full range speaker for speech and music reproduction.
- ▶ 100V line operation with power taps 24W, 12W, and 6W.
- ▶ 4 x 6"x4" full range speaker, 24W/100V.
- ▶ Ideal for railways and metro station, factories, Corridors, shops, malls etc.
- ▶ Key holes for easy wall mounting.

TECHNICAL SPECIFICATIONS

Rated Power / Max. Power	24W / 36W
Power Tappings	24W - 12W - 6W
SPL at 1W (at 1Khz,1m)	97 dB
Impedance	417/833/1667 ohm
Frequency range (-10 dB)	200 Hz ~15KHz
Dimensions	130mm (L)x 125mm (W) x 830mm (H)
Weight	4.54 Kg
Material	MDF Board
Color	Black

EWM301-12

Compact Wall Mount Speaker, ABS Body, 12W

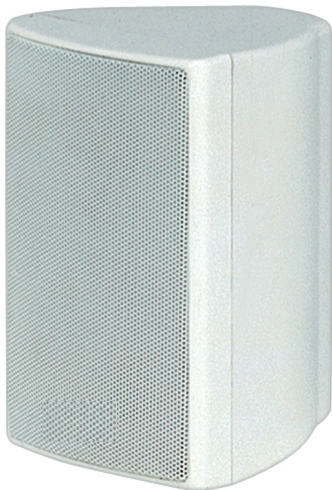

Features

- ▶ Stylish and compact plastic cabinet wall mount speaker provides high sound output in a wider area.
- ▶ Full range speaker for speech and music reproduction.
- ▶ 2-Way, 100V multi purpose PA speaker system.
- ▶ 100V line operation with power taps 12W, 6W, and 8ohm.
- ▶ 3" full range woofer, 12W/100V.
- ▶ Ideal for railways and metro station, factories, Corridors, shops, malls etc.
- ▶ Key holes and metal clamp for easy wall mounting.

TECHNICAL SPECIFICATIONS

Rated Power / Max. Power	12W / 18W
Power Tappings	12W - 6W & 8ohm
SPL at 1W (at 1Khz,1m)	88 dB
Impedance	833/1667ohm
Frequency range (-10 dB)	150 Hz ~15KHz
Dimensions	95mm (L)x 100mm (W) x 141mm (H)
Weight	0.760 Kg
Material	ABS
Color	White

EWM401-06

Compact Wall Mount Speaker, ABS Body, 6W



Features

- ▶ High quality ABS wall mounting box speaker with stylish design provides clear sound.
- ▶ Full range speaker for speech and music reproduction.
- ▶ 100V line operation with power taps 6W, 3W, and 1.5W.
- ▶ 4" full range woofer, 6W/100V.
- ▶ Ideal for shops, alarm system, malls etc.
- ▶ Key holes for easy wall mounting.

TECHNICAL SPECIFICATIONS

Rated Power / Max. Power	6W / 9W
Power Tappings	6W - 3W - 1.5W
SPL at 1W (at 1Khz,1m)	92 dB
Impedance	1667/3333/6666ohm
Frequency range (-10 dB)	800 Hz ~15KHz
Dimensions	127mm (L)x 77mm (W) x 150mm (H)
Weight	0.610 Kg
Material	ABS
Color	White

EWM402-25

Compact Wall Mount Speaker, ABS Body, 25W



Features

- ▶ Stylish plastic cabinet wall mount speaker provides high sound output in a wider area.
- ▶ Full range speaker for speech and music reproduction.
- ▶ 2-Way, 100V multi purpose PA speaker system.
- ▶ 100V line operation with power taps 25W.
- ▶ 3.5" full range woofer, 25W/100V.
- ▶ Ideal for railways and metro station, factories, Corridors, shops, malls etc.
- ▶ Key holes and metal clamp for easy wall mounting.

TECHNICAL SPECIFICATIONS

Rated Power / Max. Power	25W / 37W
Power Tappings	25W
SPL at 1W (at 1Khz,1m)	88 dB
Impedance	400ohm
Frequency range (-10 dB)	150 Hz ~15KHz
Dimensions	130mm (L)x 180mm (W) x 200mm (H)
Weight	1.120 Kg
Material	ABS
Color	White

EWM601-06

Wall Mount Speaker, ABS Body, 6W



Features

- ▶ High quality ABS wall mounting box speaker with stylish design provides clear sound.
- ▶ Full range speaker for speech and music reproduction.
- ▶ 100V line operation with power taps 6W, 3W, and 1.5W.
- ▶ 6" full range speaker, 6W/100V.
- ▶ Ideal for shops, railways stations, corridors, malls etc.
- ▶ Key holes for easy wall mounting.

TECHNICAL SPECIFICATIONS

Rated Power / Max. Power	6W / 9W
Power Tappings	6W - 3W - 1.5W
SPL at 1W (at 1Khz,1m)	92 dB
Impedance	1667/3333/6666/ohm
Frequency range (-10 dB)	110 Hz ~15KHz
Dimensions	180mm (L)x 120mm (W) x 260mm (H)
Weight	1.330 Kg
Material	ABS
Color	White

EWM641-12

Wall Mount Speaker, ABS Body, 12W



Features

- ▶ High quality ABS wall mounting box speaker with stylish design provides clear sound.
- ▶ Full range speaker for speech and music reproduction.
- ▶ 100V line operation with power taps 12W, 6W, and 3W.
- ▶ 6" x 4" full range Speaker, 12W/100V.
- ▶ Ideal for shops, alarm system, malls etc.
- ▶ Key holes for easy wall mounting.

TECHNICAL SPECIFICATIONS

Rated Power / Max. Power	12W / 18W
Power Tappings	12W - 6W - 3W
SPL at 1W (at 1Khz,1m)	92 dB
Impedance	833/1667/3333 ohm
Frequency range (-10 dB)	150 Hz ~11KHz
Dimensions	205mm (L)x 143mm (W) x 140mm (H)
Weight	1.200 Kg
Material	ABS
Color	White

EWM-RE06

Wall Mount Speaker, ABS Body, 6W



Features

- ▶ High quality ABS wall mounting box speaker with stylish design provides clear sound.
- ▶ Full range speaker for speech and music reproduction.
- ▶ 100V line operation with power taps 6W, 3W, and 1.5W.
- ▶ 6" x 4" full range speaker, 6W/100V.
- ▶ Ideal for shops, alarm system, malls etc.
- ▶ Key holes for easy wall mounting.

TECHNICAL SPECIFICATIONS

Rated Power / Max. Power	6W / 9W
Power Tappings	6W - 3W - 1.5W
SPL at 1W (at 1Khz, 1m)	92 dB
Impedance	1667/3333/6666/ohm
Frequency range (-10 dB)	150 Hz ~11KHz
Dimensions	190mm (L)x 116mm (W) x 132mm (H)
Weight	0.870 Kg
Material	ABS
Color	White

Circular Horn Speaker

Features

- ▶ High quality Horn speaker designed circular cabinet. Provides uniform ambience of sound in a wider area.
- ▶ Full range speaker for speech and music reproduction.
- ▶ Ideal for railways and metro platforms, factories, parking lots, schools, corridors etc.
- ▶ Provided with U type strong metal bracket for rigid mounting.

EHS-CC15



EHS-CC30



TECHNICAL SPECIFICATIONS

MODEL	EHS-CC15	EHS-CC30
Max. Power	23W	45W
Rated Power	15W	30W
Transformer power	15W - 7.5W - 3.75W	30W - 15W - 7.5W
SPL at 1W (at 1Khz,1m)	105 dB	115 dB
Impedance	667/1333/2666 ohm	333/667/1333 ohm
Frequency range (-10 dB)	500 Hz ~3.5KHz	500 Hz ~3.5KHz
Dimensions	228mm (OD)x 265mm (H)	285mm (OD)x 300mm (H)
Weight	1.450 Kg	1.850 Kg
Material	ABS	ABS
Color	White	Light Grey/White

Elliptical Horn Speaker

Features

- ▶ High quality Horn speaker designed elliptical cabinet. Provides uniform ambience of sound in a wider area.
- ▶ Full range speaker for speech and music reproduction.
- ▶ Ideal for railways and metro platforms, factories, parking lots, schools, corridors etc.
- ▶ Provided with U type strong metal bracket for rigid mounting.

EHS-EC15



EHS-EC30



TECHNICAL SPECIFICATIONS

MODEL	EHS-EC15	EHS-EC30
Max. Power	23W	45W
Rated Power	15W	30W
Transformer power	15W - 7.5W - 3.75W	30W - 15W - 7.5W
SPL at 1W (at 1Khz,1m)	105 dB	115 dB
Impedance	667/1333/2666 ohm	333/667/1333 ohm
Frequency range (-10 dB)	500 Hz ~3.5KHz	500 Hz ~3.5KHz
Dimensions	220mm (L) 162mm (W) x 235mm (H)	285mm (L) 208mm (W) x 290mm (H)
Weight	1.440 Kg	1.720 Kg
Material	ABS	ABS
Color	White	Light Grey/White

FORCE250

Passive Subwoofer



Features

- ▶ The FORCE250 is used for small to medium sized commercial installations like cafes, restaurants, retail outlets etc.
- ▶ Precise matching of the driver and enclosure result in deep and accurate bass reproduction.

TECHNICAL SPECIFICATIONS

Output	250W RMS
Speaker	12" Woofer
Enclosure Type	Tuned, bass reflex
Frequency response	28 Hz to 250 Hz
Impedance	4 Ω
Dimensions	360 (W) X 500 (H) X 420 (D)
Weight	17.4 Kg

EGS610-12

Garden Speaker, 12W



Features

- ▶ Beautiful green garden speaker which merges with the outdoor garden environment.
- ▶ wide round base for rigid floor mounting.
- ▶ 100V line operation with power taps 12W, 6W, and 3W.
- ▶ 6" full range speaker, 12W/100V.
- ▶ Ideal for outdoor application such as Garden, Park, Farm House, Lawns etc.

TECHNICAL SPECIFICATIONS

Rated Power / Max. Power	12W / 18W
Power Tappings	12W - 6W - 3W
SPL at 1W (at 1Khz, 1m)	98 dB
Impedance	833/1667/3333 ohm
Frequency range (-10 dB)	120 Hz ~15KHz
Dimensions	254mm (OD)
Weight	5.10 Kg
Material	Iron Pole
Color	Green

EGS620-12

Garden Speaker With Light, 12W



Features

- ▶ Beautiful green garden speaker which merges with the outdoor garden environment.
- ▶ Wide round base for rigid floor mounting.
- ▶ 100V line operation with power taps 12W, 6W, and 3W.
- ▶ 6" full range speaker, 12W/100V.
- ▶ Ideal for outdoor application such as Garden, Park, Farm House, Lawns etc.
- ▶ Inbuilt bulb for light.

TECHNICAL SPECIFICATIONS

Rated Power / Max. Power	12W / 18W
Power Tappings	12W - 6W - 3W
SPL at 1W (at 1Khz, 1m)	98 dB
Impedance	833/1667/3333 ohm
Frequency range (-10 dB)	120 Hz ~15KHz
Dimensions	254mm (OD)
Weight	4.50 Kg
Material	Iron Pole
Color	Green

EVC-12 & EVC-36



Features

- ▶ Compatible with all speakers which have 100V line matching transformer.
- ▶ Compact Design with beautiful white plastic housing.
- ▶ High wattage rotary switch with 10 selectable position. Max, 9 attenuated position (in 3dB steps).
- ▶ Easy to install on walls & panels. Can also be mounted on a standard electrical junction box pre-fitted on a wall.
- ▶ Suitable for connection to a speaker or group of speakers with power rating up to 12W for EVC-12 and 36W for EVC-36.

TECHNICAL SPECIFICATIONS

MODEL	EVC-12	EVC-36
Rated Power	12W	36W
Input Voltage	100V	100V
Attenuation steps	9x3 dB + 2 Off	9x3 dB + 2 Off
Connection terminal	4-way screw terminal	4-way screw terminal
Dimensions	92mm x 91mm x 85mm	92mm x 91mm x 85mm
Weight	260 gm	270 gm
Housing material	ABS	ABS
Color	White	White

ESA-100FD

Metal Fire Dome



Features

Metal Fire Dome is used to prevent fire from spreading through the speaker cavity.

- ▶ Easy assembly by tightening of screws.
- ▶ Knock-out holes for grommets and cable glands.
- ▶ Made of high quality Iron Sheet with powder coating.

TECHNICAL SPECIFICATIONS

Dimensions (LXBXH)	155.0 x 145.0 x 85.0 mm
Weight	0.270 Kg
Material	Metal
Color	Red

ABS HOUSING



Application

- ▶ ABS material housing for ceiling speaker mounting application, used where false ceiling is not applicable.
- ▶ It can be used on wall also. Easy to install.



TECHNICAL SPECIFICATIONS

MODEL	ESA-140SH	ESA-83SH	ESA-143SH	ESA-116SH	ESA-154SH	ESA-180SH
Dimensions (ODXH)	247.0 x 75.0 mm	200 x 95 mm	273.0 x 90.0 mm	247.0 x 75.0 mm	273.0 x 90.0 mm	272.0 x 89.0 mm
Cutout Dia (CD)	140.0 mm	83.0 mm	143.0 mm	116.0 mm	154.0 mm	180.0 mm
Weight	0.228 Kg	0.218 Kg	0.396 Kg	0.238 Kg	0.300 Kg	0.338 Kg
Material	ABS	ABS	ABS	ABS	ABS	ABS
Color	Milky White	Milky White	Milky White	Milky White	Milky White	Milky White

CEILING SPEAKERS

CABINET SPEAKERS

NETWORKING RACK

- Ceiling Speaker
(3", 4", 5", 6" & 8" respective wattage.)
- Wooden Cabinet Speaker
(5 model of different size & wattage)
- Networking Racks
(from 8U to 42U)
- Garden Speaker
- Metal Body Back Cover for ceiling Speaker
(to protect fire)
- ABS Body Back Cover for ceiling speaker
(to protect fire)
- Horn Speaker
- Aluminium Column Speaker
- Group Volume Control



Economic Audio India Pvt. Ltd.

T-4/31, Mangol Puri Indl. Area, Phase-1, Delhi-110083

Tel. : +91-11 47639717 Mob. : 9811087680, 9811656565

Email : info@economicaudio.in

Website : www.economicaudio.in

